



1-1/2AGE 18VX VANGUARD PUMP

HIGH PRESSURE, MEDIUM VOLUME, GEAR DRIVEN, ENGINE MOUNTED

MEETS ISO CLASS 9
PERFORMANCE RATINGS



VIDEO
ONLINE

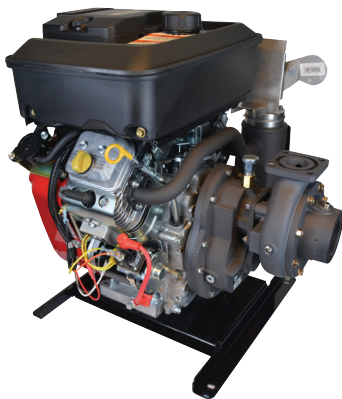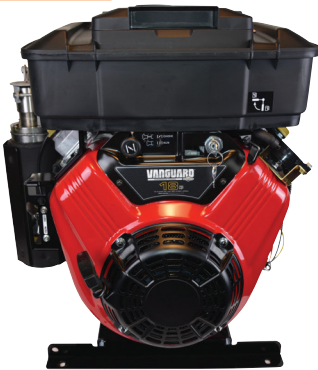

PERFORMANCE

120 gpm (454 L/M) @ 130 psi (9.0 bar)
100 gpm (378 L/M) @ 170 psi (11.7 bar)
50 gpm (189 L/M) @ 250 psi (17.2 bar)

ENGINE

- Briggs & Stratton Vanguard: 4 cycle, 18 HP, V-twin, OHV, replaceable oil filter, 34.75 cu. in. displacement, 12 volt starter, recoil rope start back-up, 16 amp regulated alternator, 8.35 qt. fuel tank or shipped loose 3 gallon tank

DIMENSIONS & WEIGHT

- 27"L x 21"W x 25"H, 145 lbs. (66 kg)

STANDARD FEATURES

- Aluminum alloy casing and discharge valve
- Aluminum alloy gear case and engine adapter
- Bronze impeller and seal ring
- Stainless steel impeller shaft
- Mechanical seal
- Heat treated alloy steel helical gears
- Ball bearing construction pump and engine
- 2" NPT suction
- 4 bolt bare flange outlet

APPLICATIONS

- Booster reel, multiple hand lines, wildland/attack fire suppression

OPTIONS

- NO DARLEY CONTROL PANEL AVAILABLE - Guzzler hand primer, exhaust primer, discharge head, base with handles, adapters, caps and pressure gauge.



FAMILY OWNED
MADE IN USA