


2BE 24K

WITH DigiTrol™ PANEL

MEDIUM PRESSURE, HIGH VOLUME, GEAR DRIVEN, ENGINE MOUNTED

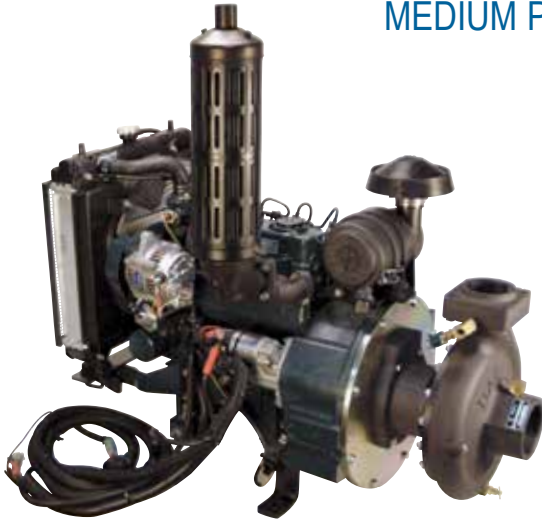

ENGINE

- Kubota D902 Diesel: 24 HP, 3600 RPM, liquid cooled, 12 volt starter, 40 amp alternator, fuel and oil pump filters

DIMENSIONS & WEIGHT

- 35" L x 23.3"W x 26.3"H (40" w/exhaust) 386 lbs. (175 kg)

APPLICATIONS

- Booster reel, multiple hand lines, transfer and supply, wildland/attack fire suppression

STANDARD FEATURES

- Aluminum alloy casing and discharge valve
- Aluminum alloy gear case and engine adapter
- Bronze impeller and wear rings
- Stainless steel impeller shaft
- Mechanical seal
- Heat treated alloy steel helical gears
- Ball bearing construction
- 3" NPT suction
- 2-1½" NPT or 1-2½" NPT discharges

PERFORMANCE

390 gpm (1476 L/M) @ 20 psi (1.4 bar)
 300 gpm (1135 L/M) @ 80 psi (5.5 bar)
 200 gpm (757 L/M) @ 115 psi (7.9 bar)



OPTIONAL INTEGRAL PRESSURE GOVERNOR AND LOSS OF WATER PROTECTION AVAILABLE ON PANELS



FAMILY OWNED
MADE IN USA