


EMBC 1000, 1250, 1500, 2000

TWO STAGE, CENTRIFUGAL, MIDSHIP MOUNTED

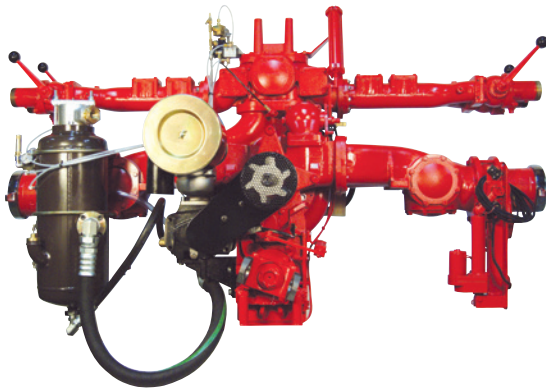

DIMENSIONS & WEIGHT

- 43" L x Apparatus Width x 45" H, 2350 lbs. (1065.9 kg)

APPLICATIONS

- Aerial
- Pumper
- Rescue Pumper
- High Rise

STANDARD FEATURES

- 4 - 2½" NH, 1/4 turn, ball, valves
- 2 - 5" or 6" NH suction adapters and caps, discharge and suction companion flanges as needed
- Air shift
- 1610 or 1710 full round yokes standard
- Pump rear of gearcase
- Output shaft for AZ02940 220 cfm compressor package

PERFORMANCE

EMBC 1000

1000 gpm (3785 L/M) @ 150 psi (10.3 bar)
700 gpm (2646 L/M) @ 200 psi (13.8 bar)
500 gpm (1893 L/M) @ 250 psi (17.2 bar)

EMBC 1250

1250 gpm (4731 L/M) @ 150 psi (10.3 bar)
875 gpm (3312 L/M) @ 200 psi (13.8 bar)
625 gpm (2365 L/M) @ 250 psi (17.2 bar)

EMBC 1500

1500 gpm (5678 L/M) @ 150 psi (10.3 bar)
1050 gpm (3974 L/M) @ 200 psi (13.8 bar)
750 gpm (2839 L/M) @ 250 psi (17.2 bar)

EMBC 2000

2000 gpm (7570 L/M) @ 150 psi (10.3 bar)
1400 gpm (5299 L/M) @ 200 psi (13.8 bar)
1000 gpm (3785 L/M) @ 250 psi (17.2 bar)
100 gpm (378 L/M) @ 500 psi (34.5 bar)

SIMULTANEOUS CAFS FLOW

440 gpm & 220 cfm @ 125 psi

