

TSP 1500, 1750, 2000

COMPACT SINGLE STAGE, CENTRIFUGAL, PTO DRIVEN



UL RATINGS TO 1500 WITH THE ALLISON EVS TRANSMISSION

Assembly #1



Assembly #2

DIMENSIONS & WEIGHT

- 19" L x 18" W x 23" H, 345 lbs. (157 kg)

APPLICATIONS

- Aerial, crash fire rescue, industrial, pumper, pumper tanker, rescue pumper, tanker

STANDARD FEATURES

- 5" NPT discharge flange
- 6" NPT or weld suction flange
- **Rotation:** Engine or opposite engine
- Mechanical seal

OPTIONAL CONFIGURATIONS

- Discharge manifold
- Swept suction tee with 2 - 6" Victaulic inlets
- Available as 2-gear or 3-gear transmission

PERFORMANCE

TSP 1500 PERFORMANCE

- 1500 gpm (5678 L/M) @ 150 psi (10.3 bar)
- 1500 gpm (5678 L/M) @ 165 psi (11.4 bar)
- 1050 gpm (3975 L/M) @ 200 psi (13.8 bar)
- 750 gpm (2839 L/M) @ 250 psi (17.2 bar)

TSP 1750 PERFORMANCE

- 1750 gpm (6624 L/M) @ 150 psi (10.3 bar)
- 1750 gpm (6624 L/M) @ 165 psi (11.4 bar)
- 1225 gpm (4637 L/M) @ 200 psi (13.8 bar)
- 875 gpm (3312 L/M) @ 250 psi (17.2 bar)


TSP 2000 PERFORMANCE

- 2000 gpm (7571 L/M) @ 150 psi (10.3 bar)
- 2000 gpm (7571 L/M) @ 200 psi (13.8 bar)
- 1400 gpm (5300 L/M) @ 250 psi (17.2 bar)
- 1000 gpm (3785 L/M) @ 250 psi (17.2 bar)

ARFF PERFORMANCE

- 2000 gpm (7571 L/M) @ 225 psi (15.5 bar)



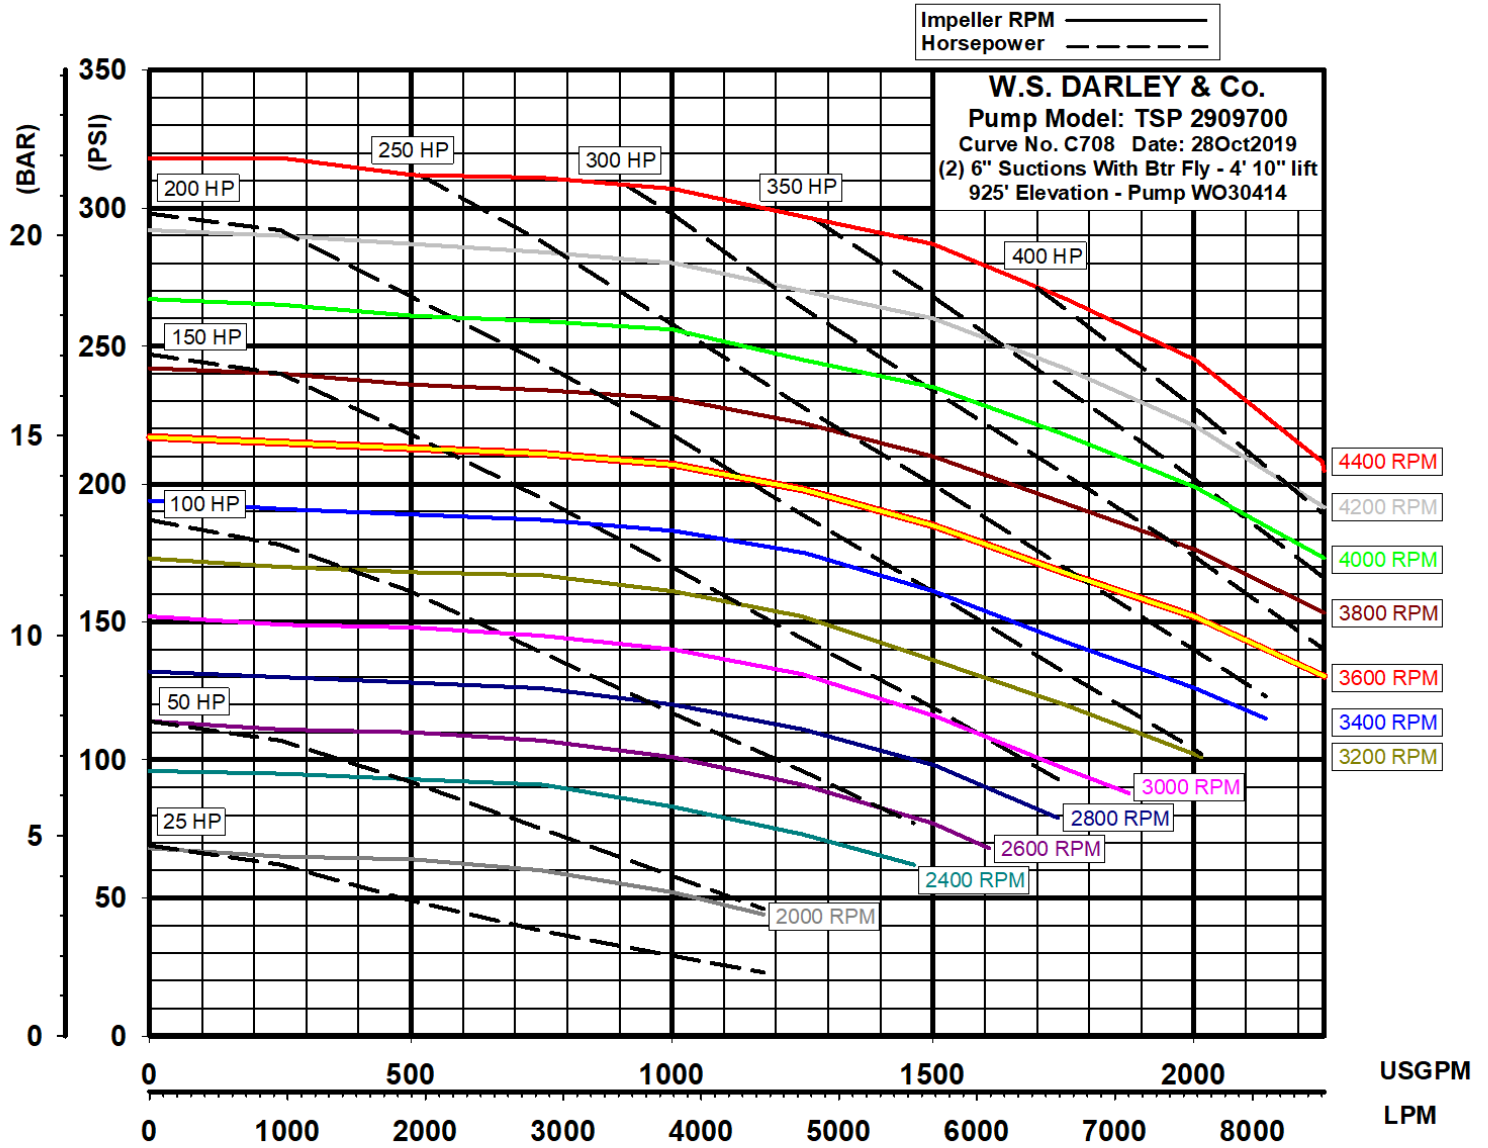

**FAMILY OWNED
MADE IN USA**