


REVISIONS				
LTR	DESCRIPTION	DATE	CHG NO.	APPRD

# PS 2 GEAR CONFIGURATIONS

SHOWN TO THE LEFT ARE FOUR GEARCASE ORIENTATIONS: STANDARD (INPUT BELOW PUMP SHAFT), INPUT SHAFT LEFT, INVERTED (INPUT ABOVE PUMP SHAFT), AND INPUT SHAFT RIGHT. EACH GEARCASE ORIENTAION IS SHOWN WITH SIX AVAILABLE PUMP CONFIGURATIONS IN 90° INTERVALS AND 60° FROM STANDARD IN LEFT HAND AND RIGHT HAND VERSIONS. DEFAULT CONFIGURATION WILL BE STANDARD GEARCASE ORIENTATION PUMP CONFIGURATION #1

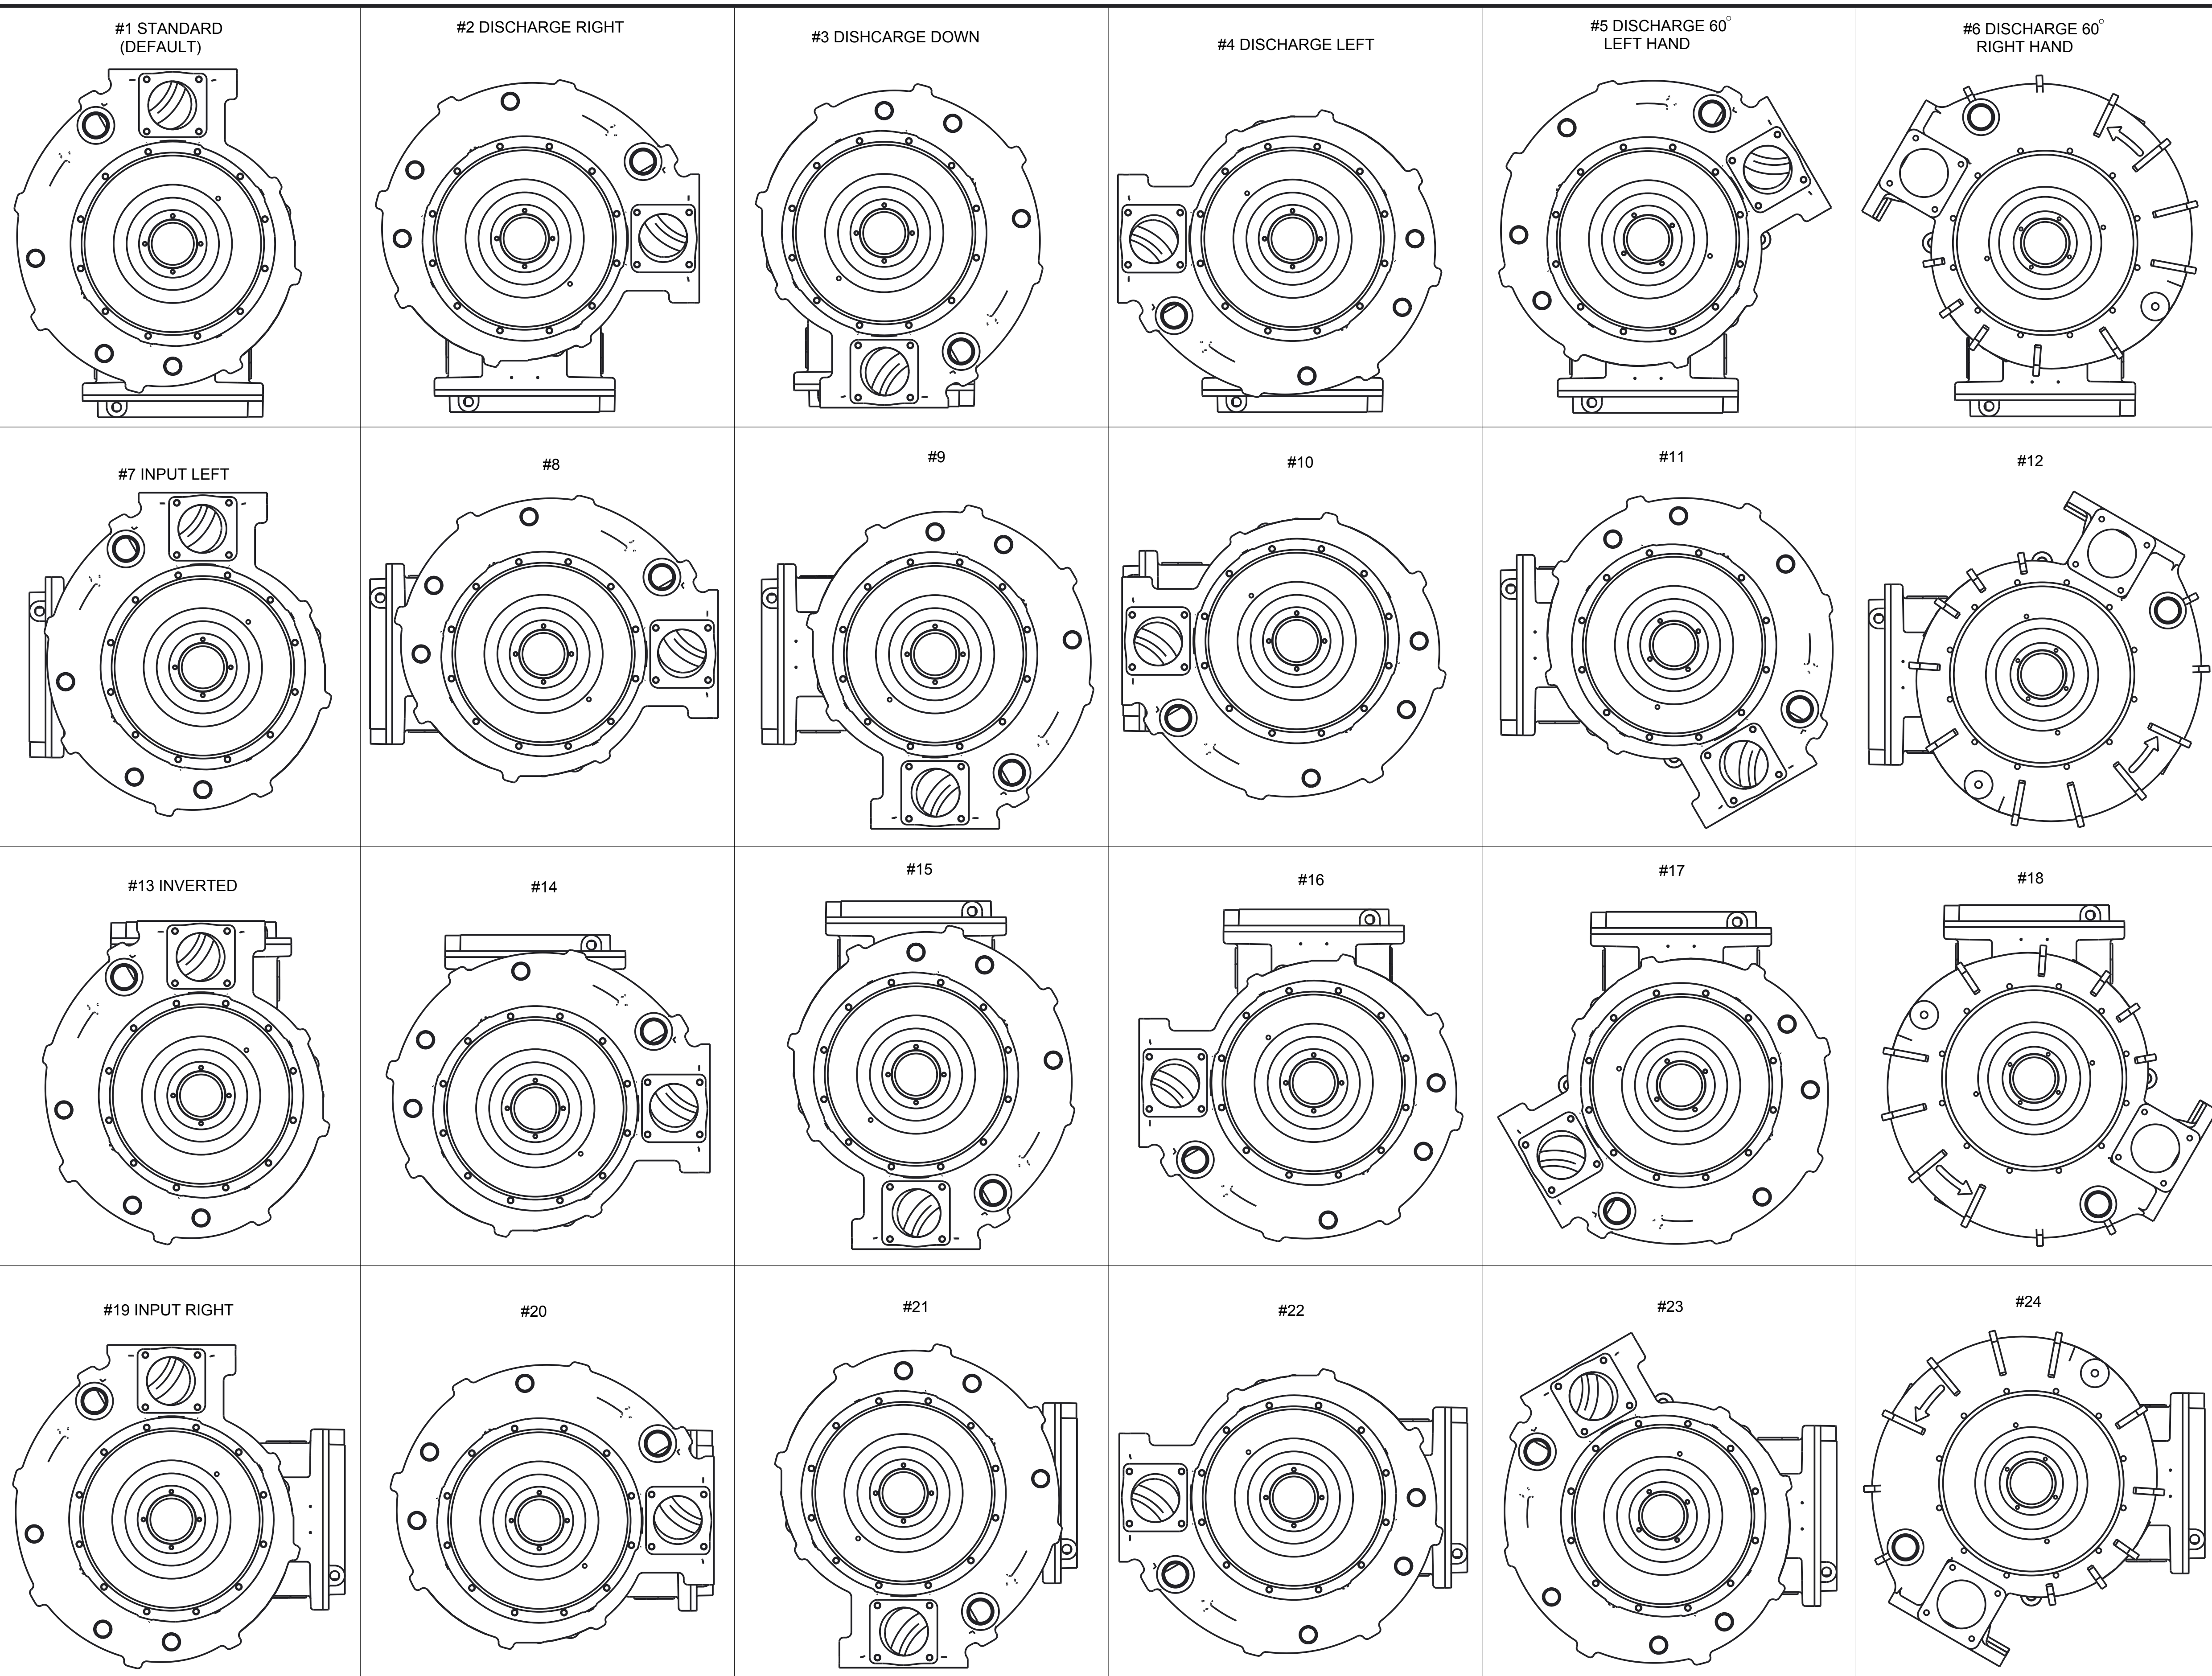

MODEL NAME: DPD0710 DISCHARGE STANDARD  
 MEX CREATED: AUG12  
 SHEET: 1/1 D

REMOVE SHARP EDGES	INCH (MILLIMETER)	OLD PART NO.	TOLERANCE EXCEPT AS NOTED 00 ±.03 2000 ±.010 ANGLES ±.1°	W.S. Darley & Co. ITASCA, IL - CHIPPEWA FALLS, WI
MATERIAL DESCRIPTION: THIS DESIGN IS THE PROPERTY OF W.S. DARLEY AND CO. - UNAUTHORIZED REPRODUCTION IS PROHIBITED	ALL DIMENSIONS IN INCHES UNLESS NOTED	MATERIAL NO. PATTERN NO.	DWG - PS 2 GEAR PUMP CONFIG SUCTION SIDE DATE 23-Aug-12 SCALE 3/16	DPD0710