


HE 23 VANGUARD

MEDIUM PRESSURE, HIGH VOLUME, DIRECT DRIVE, ENGINE MOUNTED

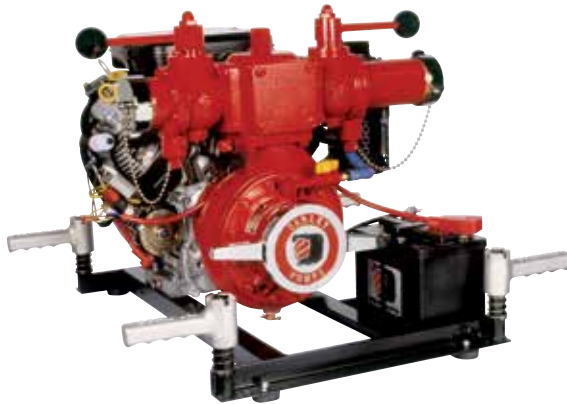

ENGINE

- Briggs & Stratton Vanguard: 4 cycle, 23 HP, V-twin, OHV, replaceable oil filter, 38.0 cu. in. displacement, 12-volt starter, recoil rope start back-up, 16 amp regulated alternator

DIMENSIONS & WEIGHT

- 24" L x 21" W x 24" H, 220 lbs. (100 kg)

APPLICATIONS

- Booster tank fill, transfer and supply

STANDARD FEATURES

ASSEMBLY #1

- Aluminum alloy casing
- Bronze impeller and seal ring
- Stainless steel impeller shaft
- 4" NPT suction
- 3" NPT discharge

ASSEMBLY #2

- 4" NH suction and screen
- 1-2 $\frac{1}{2}$ " and 2-1 $\frac{1}{2}$ " NPT discharge head with check valve

ASSEMBLY #3

- Built-in discharge check valve
- 4" NH suction and screen
- 2-1 $\frac{1}{2}$ " NH discharges, $\frac{1}{4}$ turn, ball, self-locking, all bronze valve

OPTIONS

- Adapters, gauge, battery, caps

PERFORMANCE

535 gpm (2025 L/M) @ 20 psi (1.4 bar)

300 gpm (1136 L/M) @ 60 psi (4.1 bar)

100 gpm (378 L/M) @ 70 psi (4.8 bar)

