


# JMP 500 & JMP 500 NH

TWO STAGE, SERIES/PARALLEL, CENTRIFUGAL, PTO DRIVEN

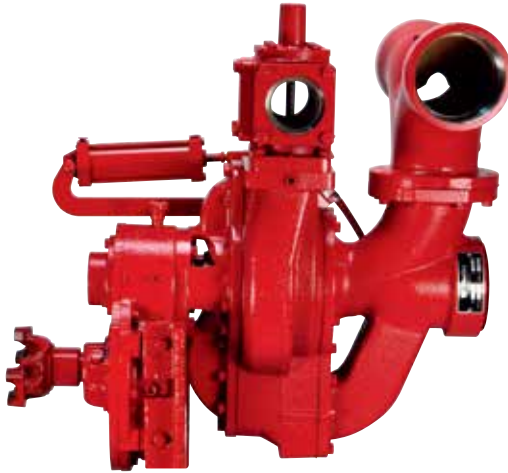

## DIMENSIONS & WEIGHT

- 241/2"L x 12"W x 26"H, 250 lbs. (114 kg)

## APPLICATIONS

- Mini Pumper, tanker, wildland/attack fire

## STANDARD FEATURES

- 3 - 2 1/2" NPT discharge flanges
- 3 - 4" NPT suction flanges
- Rotation: engine or opposite engine
- Gear ratio to fit PTO
- Mounting angles
- 1310/1410 lock on companion drive flange
- JMP 500 NH: Manual control staging valve

## PERFORMANCE

### JMP 500

- 500 gpm (1893 L/M) @ 150 psi (10.3 bar)
- 375 gpm (1325 L/M) @ 200 psi (13.8 bar)
- 250 gpm (946 L/M) @ 250 psi (17.2 bar)
- 100 gpm (378 L/M) @ 500 psi (34.5 bar)

### JMP 500 NH (NORMAL PRESSURE, HIGH PRESSURE)

- Simultaneous normal pressure, high pressure performance
- 200 gpm (756 L/M) @ 110 psi (7.6 bar)
- 100 gpm (378 L/M) @ 290 psi (20.0 bar)



JMP 500 3-Gear

