


KSPA 500, 750, 1000

SINGLE STAGE, CENTRIFUGAL, PTO DRIVEN, MIDSHIP MOUNTED, INDEPENDENT 2ND STAGE



Assembly #2

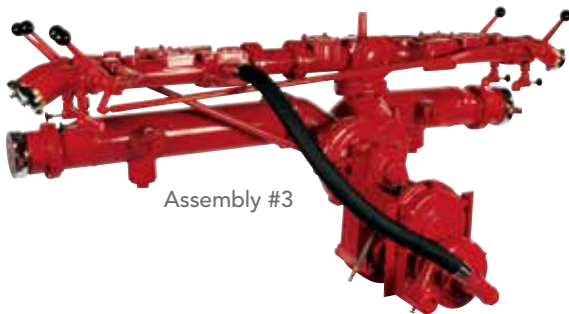

Assembly #3

DIMENSIONS & WEIGHT

- 42" L x 82" W x 37" H, 680 lbs. (309 kg)

APPLICATIONS

- Pumper, pumper tanker, rescue pumper, wildland/attack fire

STANDARD FEATURES

- Air operated clutch for 2nd stage, 1410 input flange and mounting kit

ASSEMBLY #2

- 3" or 4" NPT discharge
- 5" or 6" NPT, weld flange

ASSEMBLY #3

- 4 - 2½" NH ¼ turn, ball valves and caps, mounted
- 2 - NH suction adapters, screens and caps
- 6 - 3" booster discharge openings as needed

PERFORMANCE

KSPA 500

500 gpm (1893 L/M) @ 150 psi (10.3 bar)
350 gpm (1325 L/M) @ 200 psi (13.8 bar)
250 gpm (946 L/M) @ 250 psi (17.2 bar)

KSPA 750

750 gpm (2839 L/M) @ 150 psi (10.3 bar)
525 gpm (1987 L/M) @ 200 psi (13.8 bar)
375 gpm (1419 L/M) @ 250 psi (17.2 bar)

KSPA 1000

1000 gpm (3785 L/M) @ 150 psi (10.3 bar)
700 gpm (2646 L/M) @ 200 psi (13.8 bar)
500 gpm (1893 L/M) @ 250 psi (17.2 bar)

HIGH PRESSURE

200 gpm (757 L/M) @ 400 psi (27.6 bar)
100 gpm (379 L/M) @ 500 psi (34.5 bar)

