

# LSP 500, 750, 1000

SINGLE STAGE, CENTRIFUGAL, PTO DRIVEN

## DIMENSIONS & WEIGHT

### ASSEMBLY #1

- 18" L x 17" W x 26" H, 325 lbs. (148 kg)

### ASSEMBLY #2


- 29" L x 17" W x 39" H, 435 lbs. (197 kg)

### ASSEMBLY #3

- 29" L x 84" W x 39" H, 670 lbs. (304 kg)



Assembly #2

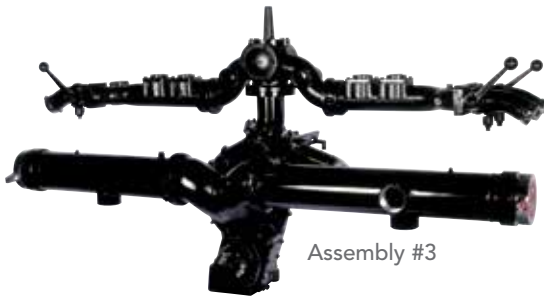

Assembly #3

## APPLICATIONS

- Mini Pumper, pumper tanker, tanker, wildland/attack fire

## STANDARD FEATURES

- 4" or 5" NPT or weld discharge flanges
- 5" or 6" NPT or weld suction flanges
- Rotation: engine or opposite engine
- 1410 lock on yoke
- Mounting angles

## PERFORMANCE

### LSP 500

500 gpm (1893 L/M) @ 150 psi (10.3 bar)  
350 gpm (1325 L/M) @ 200 psi (13.8 bar)  
250 gpm (946 L/M) @ 250 psi (17.2 bar)

### LSP 750

750 gpm (2839 L/M) @ 150 psi (10.3 bar)  
525 gpm (1987 L/M) @ 200 psi (13.8 bar)  
375 gpm (1419 L/M) @ 250 psi (17.2 bar)

### LSP 1000

1000 gpm (3785 L/M) @ 150 psi (10.3 bar)  
700 gpm (2646 L/M) @ 200 psi (13.8 bar)  
500 gpm (1893 L/M) @ 250 psi (17.2 bar)

