


## LSPH 500, 750, 1000

SINGLE STAGE, CENTRIFUGAL PUMP, PTO DRIVEN, 3 GEAR GEARCASE

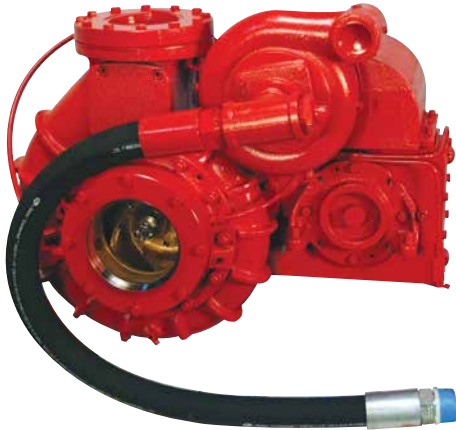

High Pressure Booster Pump

### DIMENSIONS & WEIGHT

- 30" L x 25" W x 30" H, 446 lbs. (202 kg)

### APPLICATIONS

- Mini Pumper, pumper tanker, tanker, wildland/attack fire

### STANDARD FEATURES

- 5" or 6" NPT or weld discharge flange
- 5" or 6" NPT or weld suction flange
- 2nd stage pump
- Rotation: engine or opposite engine
- 1410 lock on yoke

### PERFORMANCE

#### LSPH 500

500 gpm (1893 L/M) @ 150 psi (10.3 bar)  
350 gpm (1325 L/M) @ 200 psi (13.8 bar)  
250 gpm (946 L/M) @ 250 psi (17.2 bar)

#### LSPH 750

750 gpm (2839 L/M) @ 150 psi (10.3 bar)  
525 gpm (1987 L/M) @ 200 psi (13.8 bar)  
375 gpm (1419 L/M) @ 250 psi (17.2 bar)

#### LSPH 1000

1000 gpm (3785 L/M) @ 150 psi (10.3 bar)  
700 gpm (2646 L/M) @ 200 psi (13.8 bar)  
500 gpm (1893 L/M) @ 250 psi (17.2 bar)

#### LSPH HIGH PRESSURE

200 gpm (757 L/M) @ 400 psi (27.6 bar)  
100 gpm (379 L/M) @ 600 psi (41.3 bar)

