


UHP-HV® DIESEL

SIMULTANEOUS HIGH PRESSURE & HIGH VOLUME WITH A SINGLE ENGINE

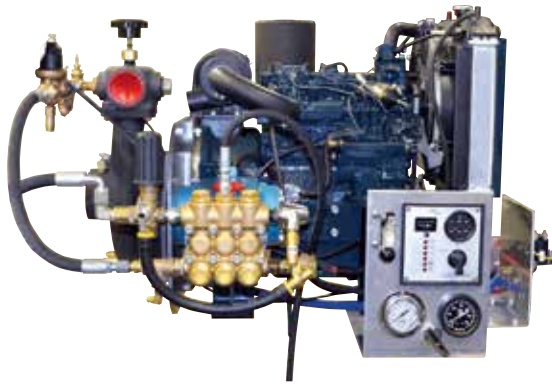

ENGINE

- Kubota DH 902: 24 HP diesel engine, 3 cylinder, 12vdc electric start

LOW PRESSURE PUMP

- Darley 2BE: High pressure discharge port, 2½" low pressure panel discharge, 2½" direct tank fill, 2½" NPT suction inlet, high and low pressure gauges

HIGH PRESSURE PUMP

- 7CP CAT: Belt driven plunger pump, 8 gpm @ 1200 psi

DIMENSIONS & WEIGHT

- 46" L (+6" length) x 46" W x 36" H, 1050 lbs. (476 kg)

APPLICATIONS

- Wildland, quick attack, rescue, skid unit, mop-up

STANDARD FEATURES

- Frame: Lightweight aluminum with fork lift access
- Stainless steel plumbing
- LOFA electric ignition control with glow plug, warning lights, tachometer and pressure gauge

PERFORMANCE

2BE WATER PUMP

140 gpm (530 L/M) @ 110 psi (7.6 bar)

200 gpm (757 L/M) @ 50 psi (3.4 bar)

HIGH PRESSURE PUMP

8 gpm (30 L/M) @ 1300 psi (89.6 bar)

SIMULTANEOUS FLOWS

100 gpm (379 L/M) @ 100 psi (6.9 bar)

8 gpm (8 L/M) @ 1100 psi (75.8 bar)

