


PSPH 1000, 1250, 1500

SINGLE STAGE, CENTRIFUGAL PUMP, PTO DRIVEN, 3 GEAR GEARCASE

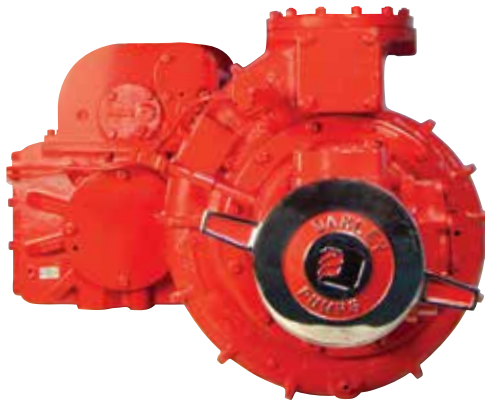

DIMENSIONS & WEIGHT

- 28" L x 24" W x 31" H, 810 lbs. (367 kg)

APPLICATIONS

- Mini pumper, pumper tanker, tanker, wildland/attack fire

STANDARD FEATURES

- 4" or 5" NPT or weld discharge flange
- 5" or 6" NPT or weld suction flange
- 2nd stage pump
- Rotation: engine or opposite engine
- 1410 lock on yoke

PERFORMANCE

PSPH 1000

1000 gpm (3785 L/M) @ 150 psi (10.3 bar)

700 gpm (2646 L/M) @ 200 psi (13.8 bar)

500 gpm (1893 L/M) @ 250 psi (17.2 bar)

PSPH 1250

1250 gpm (4731 L/M) @ 150 psi (10.3 bar)

875 gpm (3312 L/M) @ 200 psi (13.8 bar)

625 gpm (2365 L/M) @ 250 psi (17.2 bar)

PSPH 1500

1500 gpm (5678 L/M) @ 150 psi (10.3 bar)

1050 gpm (3974 L/M) @ 200 psi (13.8 bar)

750 gpm (2839 L/M) @ 250 psi (17.2 bar)

PSPH HIGH PRESSURE

200 gpm (757 L/M) @ 400 psi (27.6 bar)

100 gpm (379 L/M) @ 600 psi (41.3 bar)

