


ZSP 2500, 3000

SINGLE STAGE, CENTRIFUGAL PUMP, SINGLE SUCTION IMPELLER, PTO DRIVEN

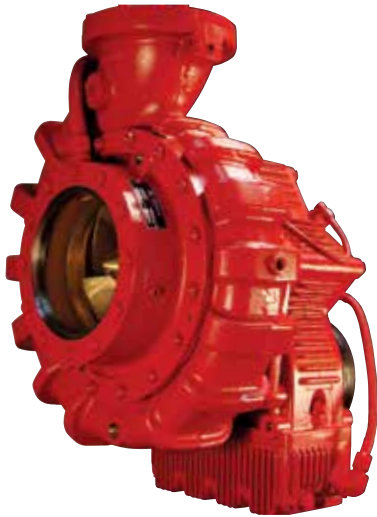

DIMENSIONS & WEIGHT

- 23.61"L x 26.12"W x 30.66"H, 613 lbs. (278 kg)

APPLICATIONS

- Industrial, chemical, aerial, ARFF, fire boat

STANDARD FEATURES

- 6" weld discharge
- 8" weld flange suction
- Mechanical seal
- MegaTrans™ transmission
- 1550 companion flange

OPTIONS

- Suction and Discharge Heads can be Built to Suit, Swept tee suction head with 8" Victaulic or 8" NH Threaded Couplings Salt Water Capable, Salt Water Capable

PERFORMANCE

ZSP 2500 NFPA Fire Pump

2500 gpm (9463 L/M) @ 150 psi (10.3 bar)

2500 gpm (9463 L/M) @ 165 psi (11.3 bar)

1750 gpm (6624 L/M) @ 200 psi (13.8 bar)

1250 gpm (4732 L/M) @ 250 psi (17.2 bar)

Using 1 - 8" or 3 - 6" suction hose

Rated at 2500 gpm for NFPA 1901 fire pump application

ZSP 3000 NFPA Industrial Rating

3000 gpm (11,356 L/M) @ 100 psi (6.9 bar)

1500 gpm (5678 L/M) @ 200 psi (13.8 bar)

Using 2 - 8" or 4 - 6" suction hose

Rated at 3000 gpm for NFPA 1901 fire pump application

