

24  
(610)

BODY WIDTH  
SPECIFIED BY CUSTOMER  
L6"  
70"  
72"

2 1/2" NS DISCHARGE VALVES


3" SUCTION

DOUBLE FLOAT PRIMER  
BOOSTER SUCTION AND DISCHARGE TAPS ARE OPTIONAL

3" NPT BOOSTER

H240 BRACKET

INTERNAL BRAKE (OPTIONAL)

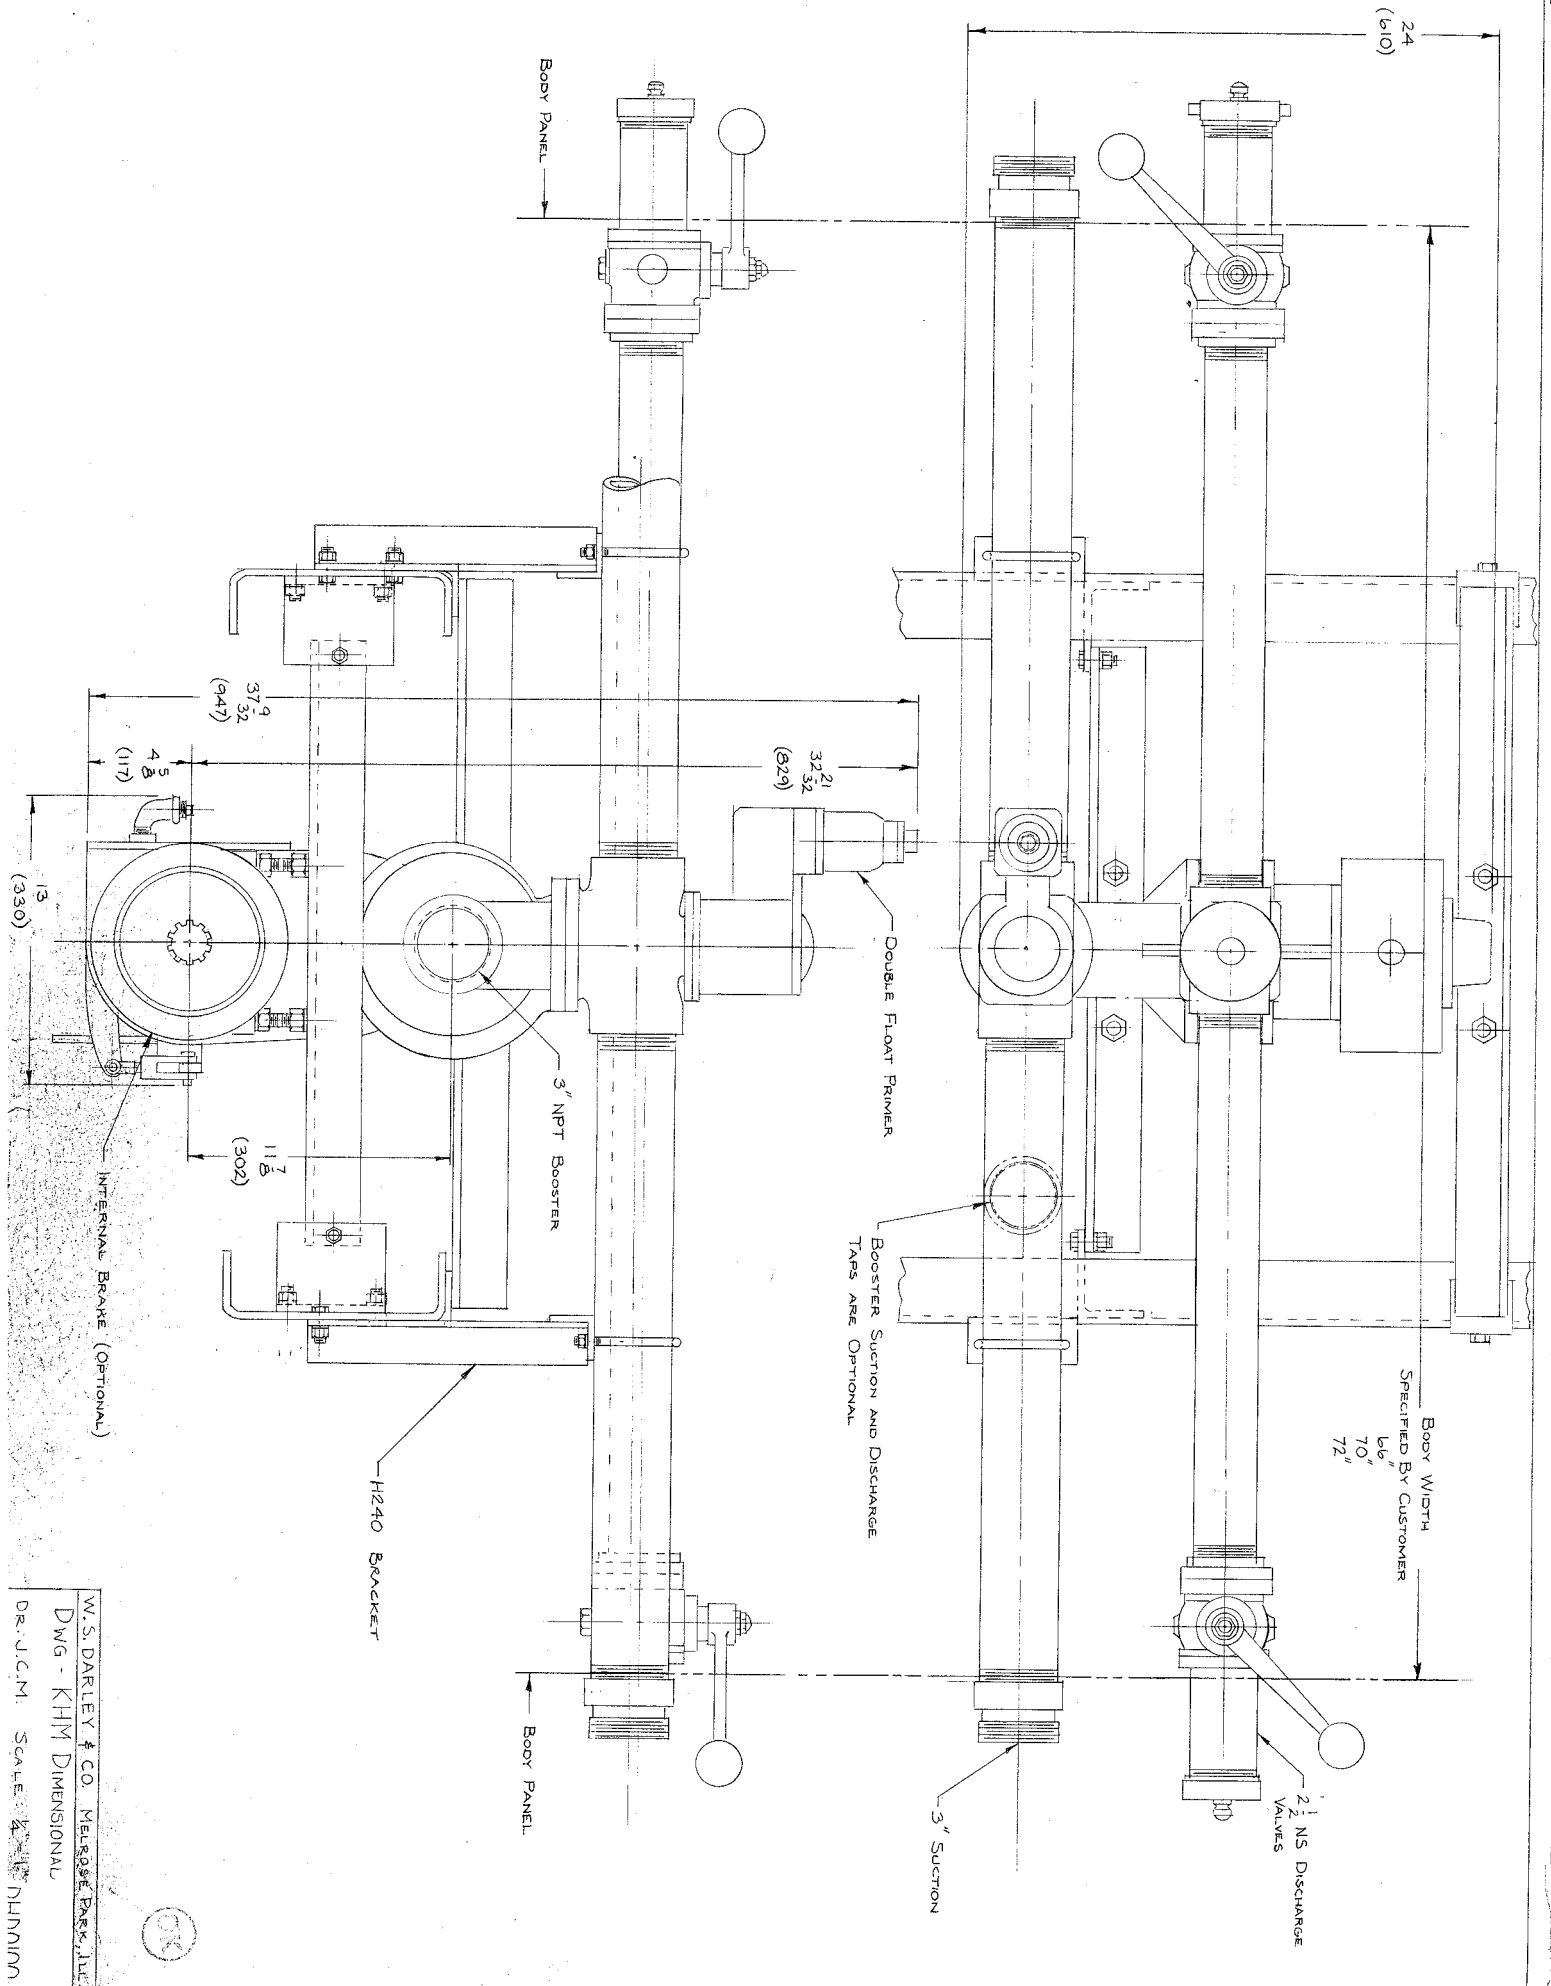

37 3/32  
(947)

4 3/8  
(117)

13  
(330)

32 21  
(829)

7 1/8  
(302)



W.S. DARLEY & CO. MELROSE PARK, ILL.  
DWG - KHM DIMENSIONAL  
DR. J.C.M. SCALE: 1/2" = 1"