


LSPH 500, 750, 1000

DOUBLE STAGE, CENTRIFUGAL PUMP, PTO DRIVEN, 3 GEAR GEARCASE

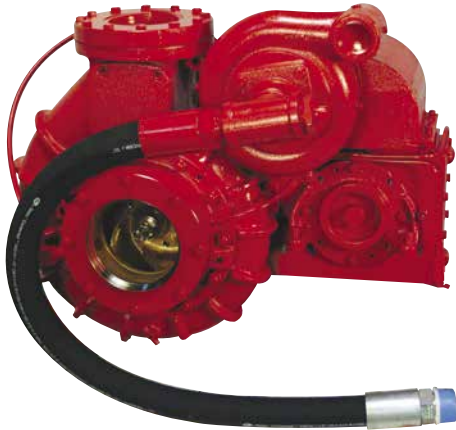

High Pressure Booster Pump

DIMENSIONS & WEIGHT

- 30" L x 25" W x 30" H, 446 lbs. (202 kg)

APPLICATIONS

- Mini Pumper, pumper tanker, tanker, wildland/attack fire

STANDARD FEATURES

- 5" or 6" NPT or weld discharge flange
- 5" or 6" NPT or weld suction flange
- 2nd stage pump
- Rotation: engine or opposite engine
- 1410 lock on yoke

PERFORMANCE

LSPH 500

500 gpm (1893 L/M) @ 150 psi (10.3 bar)
350 gpm (1325 L/M) @ 200 psi (13.8 bar)
250 gpm (946 L/M) @ 250 psi (17.2 bar)

LSPH 750

750 gpm (2839 L/M) @ 150 psi (10.3 bar)
525 gpm (1987 L/M) @ 200 psi (13.8 bar)
375 gpm (1419 L/M) @ 250 psi (17.2 bar)

LSPH 1000

1000 gpm (3785 L/M) @ 150 psi (10.3 bar)
700 gpm (2646 L/M) @ 200 psi (13.8 bar)
500 gpm (1893 L/M) @ 250 psi (17.2 bar)

LSPH HIGH PRESSURE

200 gpm (757 L/M) @ 400 psi (27.6 bar)
100 gpm (379 L/M) @ 600 psi (41.3 bar)

