


## LSRH 500, 750, 1000

DOUBLE STAGE, CENTRIFUGAL, PTO DRIVEN, 3 GEAR GEARCASE

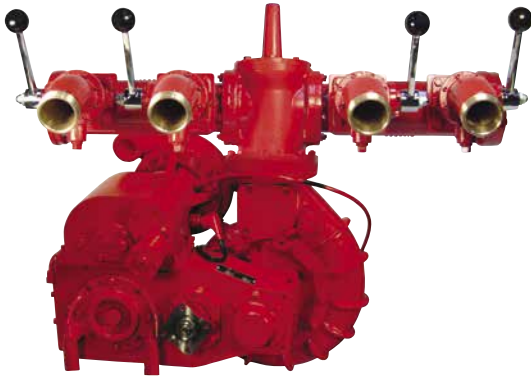

### DIMENSIONS & WEIGHT

- 34" L x 38" W x 33" H, 446 lbs. (202 kg) - Assembly #1

### APPLICATIONS

- Aerial, pumper, pumper tanker, rescue pumper, tanker

### STANDARD FEATURES

- 4" or 5" NPT or weld discharge flange
- 5" or 6" NPT or weld suction flange
- 2nd stage pump
- Rotation: Engine or opposite engine
- 1410 lock on yoke
- Mechanical seal on main pump

### PERFORMANCE

#### LSRH 500

500 gpm (1893 L/M) @ 150 psi (10.3 bar)

350 gpm (1325 L/M) @ 200 psi (13.8 bar)

250 gpm (946 L/M) @ 250 psi (17.2 bar)

#### LSRH 750

750 gpm (2839 L/M) @ 150 psi (10.3 bar)

525 gpm (1987 L/M) @ 200 psi (13.8 bar)

375 gpm (1419 L/M) @ 250 psi (17.2 bar)

#### LSRH 1000

1000 gpm (3785 L/M) @ 150 psi (10.3 bar)

700 gpm (2646 L/M) @ 200 psi (13.8 bar)

500 gpm (1893 L/M) @ 250 psi (17.2 bar)

#### LSRH HIGH PRESSURE

200 gpm (757 L/M) @ 500 psi (34.5 bar)

100 gpm (379 L/M) @ 600 psi (41.3 bar)

