



1051 Palmer Street  
 Chippewa Falls, WI 54729  
 Phone (800) 634-7812  
 Fax (715) 726-2656

325 Spring Lake Dr  
 Itasca, IL 60143-2072  
 Phone (708) 345-8050  
 Fax (708) 345-8993

**PSE PUMP ORDER FORM**

Please review the order form before starting. If any challenges arise, please call our Customer Service Department at (800) 634-7812 for assistance. We will be glad to help. Please fill in the information **completely.**  
 Rated capacity 1000 / 1250 / 1500 GPM (Circle choice)

\*If special testing is required, please indicate your need.

Imperial Gallons (List Capacity) \_\_\_\_\_ Liters Per Minute (List Capacity) \_\_\_\_\_ Other (Specify) \_\_\_\_\_

P.O. No. \_\_\_\_\_ Date \_\_\_\_\_ Account No.: \_\_\_\_\_

Bill To: \_\_\_\_\_ Ship To: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Desired Delivery Date: \_\_\_\_\_ Order Completed By: \_\_\_\_\_ End Customer: \_\_\_\_\_ Telephone No.: \_\_\_\_\_

\_\_\_\_\_

**PUMP/ENGINE INFORMATION**

Engine \_\_\_\_\_ HP @ \_\_\_\_\_ RPM Color \_\_\_\_\_  
 Altitude \_\_\_\_\_ FT.

Model \_\_\_\_\_

Flywheel \_\_\_\_\_

Flywheel Housing \_\_\_\_\_

\* If flywheel and housing are not an SAE standard, complete form 1206001 and contact Darley engineering with information

**PUMP RATING  
 (check one)**

\_\_\_\_\_ NFPA 1901 Fire Pump

\_\_\_\_\_ Other \_\_\_\_\_

Prepared By: AAN  
 Approved By: LJM/ TED

1202024

**OPTIONAL EQUIPMENT**

Qty./Choice

Description

*\* Enter quantity or choice in column at left.*

- \_\_\_\_\_ Mechanical Seal
- \_\_\_\_\_ Electric Clutch 12V or 24V
- \_\_\_\_\_ Discharge Valves with 30° Down Nipples Attached to Pump (Straight Nipples are Standard)
- \_\_\_\_\_ Discharge Valves with 30° Down Nipples (Shipped Loose)
- \_\_\_\_\_ Suction Caps 5" or 6"
- \_\_\_\_\_ Suction Valves 2-1/2" NST Female (Shipped Loose)
- \_\_\_\_\_ Suction Valves 2-1/2" NST Female Full Flow (Shipped Loose)
- \_\_\_\_\_ 3/4" Drain Valves Available on Suction or Discharge Valves
- \_\_\_\_\_ Primer with Primer Valve (Enter at left – 12 V or 24V – Qty – Fluid or Fluidless)
- \_\_\_\_\_ Pressure Relief Valve with Remote Control and Pilot Light Installed on Pump
- \_\_\_\_\_ Pressure Relief Valve with Remote Control and Pilot Light (Shipped Loose)
- \_\_\_\_\_ Suction Relief Valve with Remote Control
- \_\_\_\_\_ Hand Speed Counter and Cable
- \_\_\_\_\_ Electric Tachometer, Speed Counter and Cable
- \_\_\_\_\_ Master Drain Valve (9 Openings)
- \_\_\_\_\_ Isolated Ports Master Drain Valve (6 Openings)
- \_\_\_\_\_ Pump Overheat Protection System
- \_\_\_\_\_ "Vision Series" Panel Markers for Relief Valve and Primer

**\* PLEASE ATTACH SPECIAL INSTRUCTIONS TO THIS FORM**



W.S. Darby Co.

PSE PUMP ORDER FORM

DISCHARGE HEAD OR FLANGE SIZE

- DISCHARGE HEAD
- 5" WELD FLANGE
- 5" NPT
- 4" NPT
- 4" WELD

IF FEWER THAN (4) VALVES, INDICATE VALVE POSITIONS

- VALVE #1
- VALVE #2

- VALVE #3
- VALVE #4

RELIEF VALVE OPTIONAL

FLANGE SIZE

BL	1.5	2	2.5	3
----	-----	---	-----	---

FLANGE SIZE


BL	1.5	2	2.5	3
----	-----	---	-----	---

- SUCTION INLET TYPE
- 6" NH (STANDARD)
  - 6" VICTAULIC
  - 6" NPT

FLANGE SIZE

BL	1.5	2	2.5	3
----	-----	---	-----	---

GEARCASE POSITIONS AS VIEWED FACING SUCTION INLET SELECT ONE

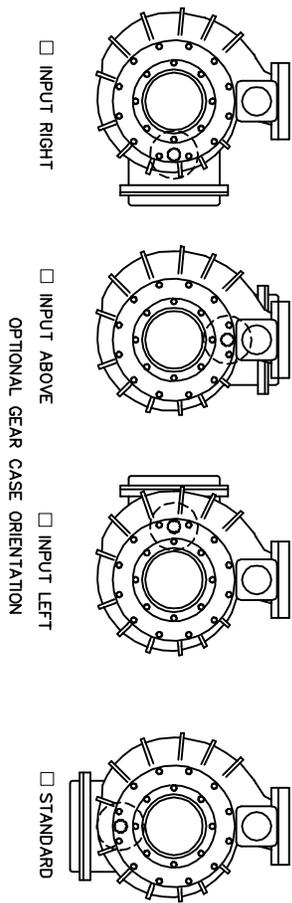

OPTIONAL GEAR CASE ORIENTATION

FLANGE SIZE 4" NPT ONLY