


PSRH 1000, 1250, 1500

SINGLE STAGE, CENTRIFUGAL, REAR MOUNT PUMP WITH INDEPENDENT SECOND STAGE

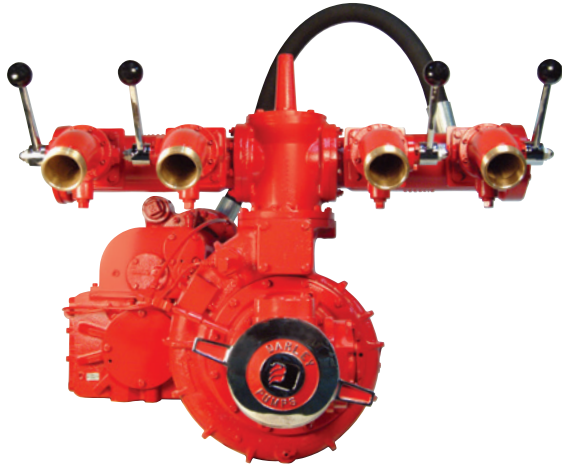

DIMENSIONS & WEIGHT

- 34" H x 40" W x 36" D, 782 lbs. (354 kg)

APPLICATIONS

- Pumper, pumper tanker, rescue pumper, tanker

STANDARD FEATURES

ASSEMBLY #1

- 4" or 5" NPT or weld discharge flange
- 2nd stage pump
- 5" or 6" NPT or weld flange suction
- Rotation: Engine or opposite engine
- 1410 lock on yoke

ASSEMBLY #3

- Discharge manifold with 4-2½" NH, ¼ turn, ball, discharge valves and caps, mounted
- 3" NPT discharge tap
- 5" or 6" NPT or weld flange suction

PERFORMANCE

PSRH 1000

1000 gpm (3785 L/M) @ 150 psi (10.3 bar)
700 gpm (2646 L/M) @ 200 psi (13.8 bar)
500 gpm (1893 L/M) @ 250 psi (17.2 bar)

PSRH 1250

1250 gpm (4731 L/M) @ 150 psi (10.3 bar)
875 gpm (3312 L/M) @ 200 psi (13.8 bar)
625 gpm (2365 L/M) @ 250 psi (17.2 bar)

PSRH 1500

1500 gpm (5678 L/M) @ 150 psi (10.3 bar)
1050 gpm (3974 L/M) @ 200 psi (13.8 bar)
750 gpm (2839 L/M) @ 250 psi (17.2 bar)

PSRH HIGH PRESSURE

200 gpm (757 L/M) @ 500 psi (34.5 bar)
100 gpm (379 L/M) @ 600 psi (41.3 bar)

