


1-1/2AGE 21H PUMP

HIGH PRESSURE, LOW VOLUME, GEAR DRIVEN, ENGINE MOUNTED

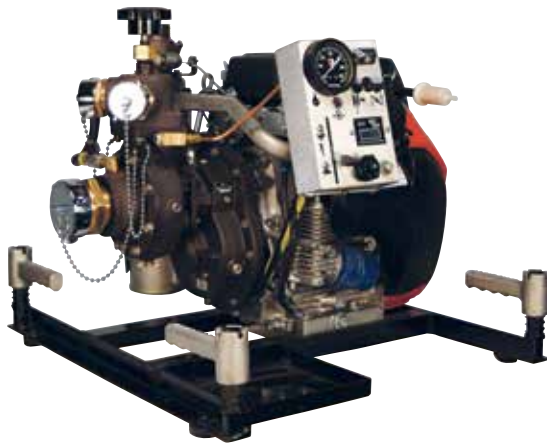

ENGINE

- Honda GX 630: 4 cycle, 21 hp, V-twin, OHV, 6 gal. fuel tank, replaceable oil filter, 38.5 cu. in. displacement, 12 volt starter, 20 amp regulated alternator, hose and adapter

DIMENSIONS & WEIGHT

- 24"L x 24"W x 23"H, 145 lbs. (66 kg)

APPLICATIONS

- Booster reel, multiple hand lines, wildland/attack fire suppression

STANDARD FEATURES

- Aluminum alloy casing and discharge valve
- Discharge valve
- Sulfuric anodized aluminum alloy gear case and engine adapter
- Bronze impeller and wear ring
- Stainless steel impeller shaft
- Mechanical seal
- Built-in discharge check valve
- Adjustable discharge valve
- 2" NPT suction
- 2-1/2" NPT or 1-2 1/2" NPT discharges

OPTIONS

- Adapters, gauge, battery and caps, Smartstart™

PERFORMANCE

120 gpm (454 L/M) @ 155 psi (10.7 bar)
75 gpm (284 L/M) @ 230 psi (15.9 bar)
35 gpm (95 L/M) @ 300 psi (21.7 bar)

