



Fast Attack 2 – High Pressure

High-Pressure, Low Volume Pump Ideal for
all 1" and 1.5" Discharge Needs


Specifications

Standard Features

- High pressure, low volume pump
- Exhaust primer
- 200 gallon poly water tank
- Illuminated pressure gauge
- 2" welded stainless steel auxiliary suction with a 2.5" adapter 2" tank to pump
- All welded stainless steel manifold painted blue, including 1" tank fill
- 1" pump to booster reel
- 1.5" NST discharge
- Chrome caps
- Electric booster reel with 100' of 1" booster hose

Optional Features

- Foam Systems Around the pump (ATP) or downstream injection
- Hose tray with Mattydale swivel preconnect
- Storage risers
- Work light
- Nozzle packages
- Custom tanks
- Optional reels & hose guiders
- Engine options including in-cab controls on both gasoline and diesel drives

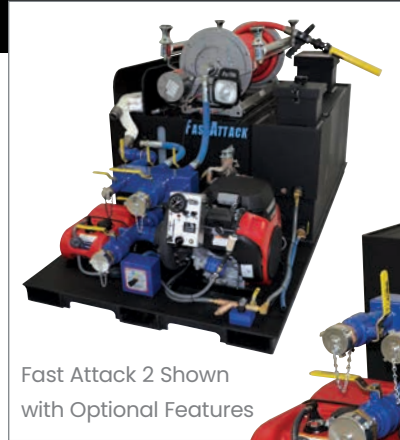

Fast Attack 2 Shown
with Optional Features



Fast Attack 2

Designed to Fit Into a Standard 8' Pickup Truck Bed

The Fast Attack 2 - High Pressure is equipped with a 1-1/2 AGE gear-driven Darley pump shown with additional 1.5" discharge.

The Fast Attack 2 - High Pressure with optional features (shown in inset) has an optional hose tray with Mattydale pre-connect, ATP foam system, nozzle package, hose guides, work light and discharges.

1-1/2 AGE 18V VANGUARD PUMP

Capable of all below

- 120 gpm (454 L/M) @ 130 psi (9 bar)
- 75 gpm (284 L/M) @ 210 psi (14.5 bar)
- 35 gpm (95 L/M) @ 265 psi (18.3 bar)

1-1/2 AGE 21H PUMP

Capable of all below

- 120 gpm (454 L/M) @ 155 psi (10.7 bar)
- 75 gpm (284 L/M) @ 230 psi (15.9 bar)
- 35 gpm (95 L/M) @ 300 psi (21.7 bar)



Fast Attacks shown
with our gear driven
pumps complete
with our Foam Flurry
ATP Systems.



darley.com/pumps
800.323.0244