



# P100 (Navy P100)

NSN: 4320-01-387-2869

## Specifications



### Dimensions & Weight

- 24" L x 24" W x 23" H, 163 lbs. (74 kg)



### Engine

- Yanmar L100N: 4 cycle, 10 HP, 1 cylinder, recoil rope start back-up, optional 12 volt electric start and alternator




### Features

- Bronze or hard anodized pump
- 316 stainless shaft and fittings
- High performance ceramic coating
- Imron painted engine
- Anodized aluminum alloy casing
- Discharge head
- Engine adapter
- Bronze impeller and wear rings
- Stainless steel impeller shaft
- Shredded plastic packing
- Discharge check valve
- Adjustable discharge valve
- Throttle
- Roll cage
- Pressure gauge
- Exhaust primer
- 3" NST suction with cap
- 2 1/2" NST discharge with cap
- 2"x10' engine exhaust hose



### Applications

- Marine, dewatering, transfer and supply

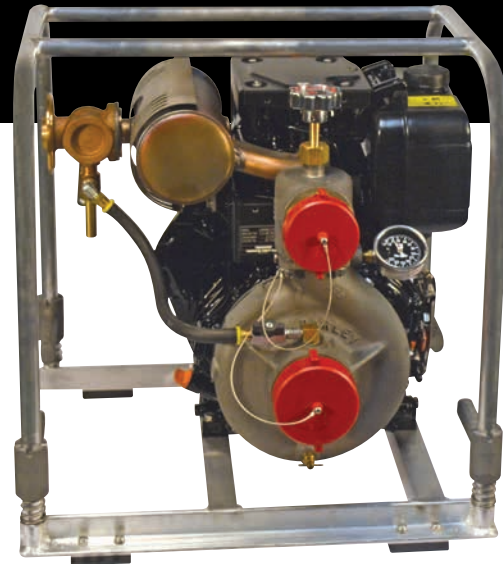

2BE10YDN

## Medium Pressure, High Volume, Engine Mounted

The P100 pump is the choice of the US Navy.

### Options

- Adapters
- Caps
- Electric start
- Mechanical seal

250 gpm (946 L/M) @ 20 psi (1.4 bar)

180 gpm (681 L/M) @ 50 psi (4.1 bar)

95 gpm (359 L/M) @ 90 psi (6.2 bar)



darley.com/pumps  
800.323.0244