Darley®

EMP 2000

TWO STAGE, CENTRIFUGAL, PTO DRIVEN

DIMENSIONS & WEIGHT

- 44"L x 84"W x 39"H, 1400 lbs. (636 kg)

APPLICATIONS

- Pumper, pumper tanker, high pressure flows for high rise applications

STANDARD FEATURES

- 4 - 2½" NH, ¼ turn, ball self-locking valves and caps, 2 each side
- 2 - 5" or 6" NH suction adapters and caps
- 1610 or 1710 full round yokes standard
- Air shift
- Two-stage design for parallel and series operation

OPTIONS

- Available with a CAFS 3rd stage high pressure booster pump

PERFORMANCE

EMP 2000

2000 gpm (7570 L/M) @ 150 psi (10.3 bar)
1400 gpm (5299 L/M) @ 200 psi (13.8 bar)
1000 gpm (3785 L/M) @ 250 psi (17.2 bar)
100 gpm (378 L/M) @ 500 psi (34.5 bar)

FAMILY OWNED MADE IN USA

PUMPSALES@DARLEY.COM
1.800.4.DARLEY • DARLEY.COM •

Darley®

EMP 2000

CURVE

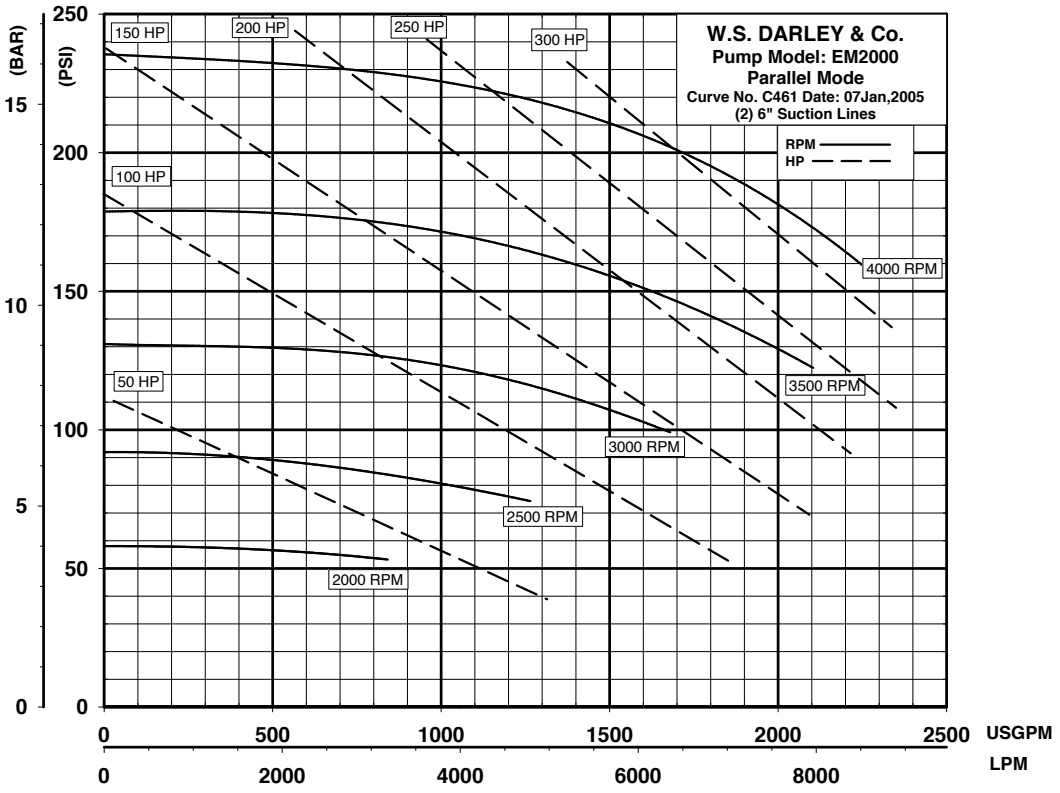
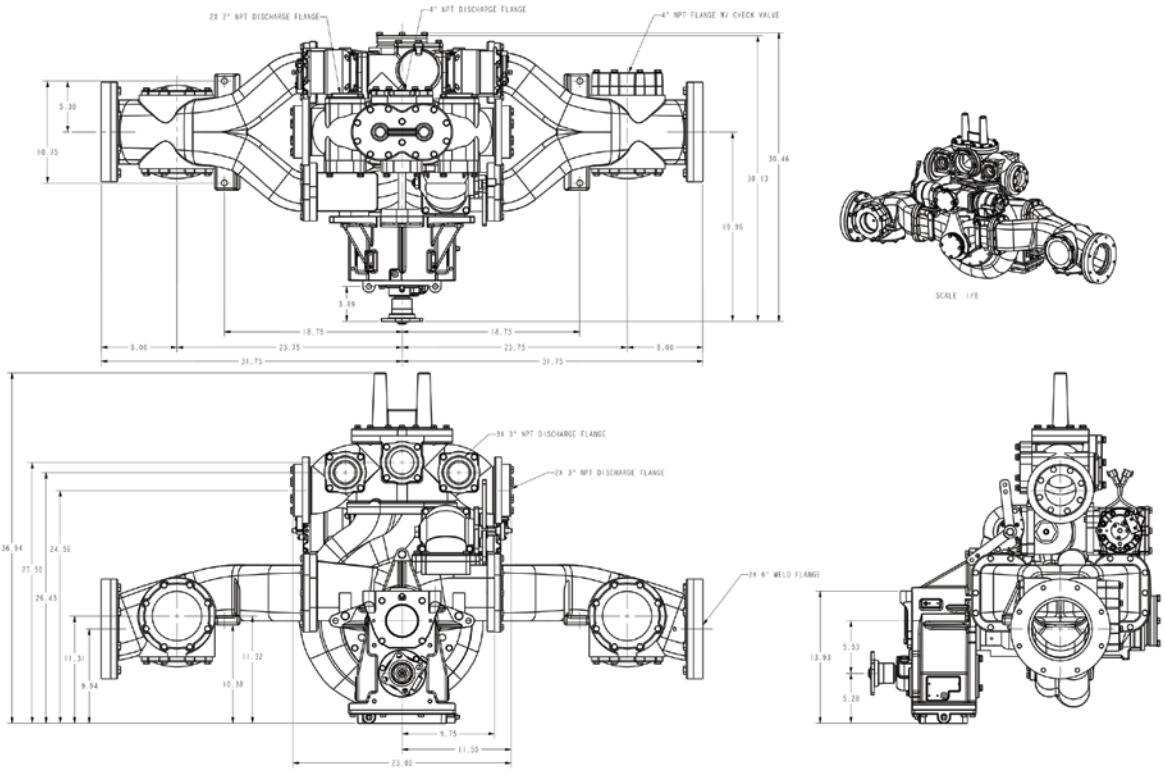
DRAWINGS