


# HE 64RP "HERCULES" MARINISED PORTABLE

## ULTRA HIGH PERFORMANCE PORTABLE VERSION

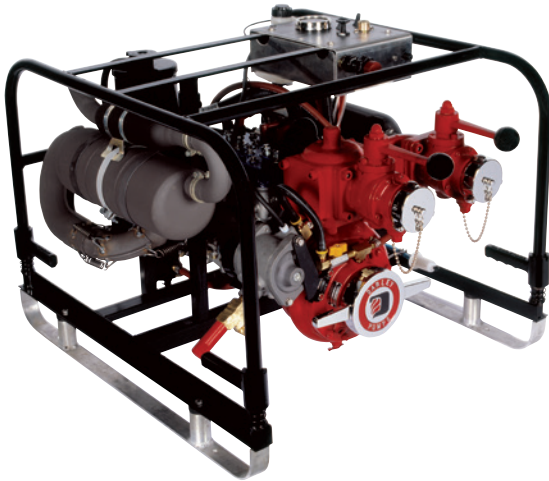

### ENGINE

Rotax 582: Liquid-cooled, 64 HP, 2 cycle without injection, 12-volt electric starter, recoil rope start back-up, 6 gal. fuel tank, hose and adapter

### DIMENSIONS & WEIGHT

- 34" L x 30"W x 26"H, 225 lbs. (102 kg)

### APPLICATIONS

- Fire boat, booster tank fill, multiple hand lines, wildland/attack fire suppression

### STANDARD FEATURES

- 170W lighting and recharging coil
- Aluminum alloy casing
- Bronze impeller and seal ring
- Stainless steel impeller shaft
- Mechanical seal
- Belt driven rotary primer
- Heat exchanger with thermal protection circuit
- Wraparound frame with fold out handles
- Loss of prime shutdown
- Pressure governor
- Vernier throttle
- 4" NH suction with screen
- 2-1/4 turn self-locking 2 1/2" NH discharge ball valves with caps
- Available with wheels

### OPTIONS

- Adapters, gauge, battery, caps, and bronze pump valve

### PERFORMANCE

575 gpm (2176 L/M) @ 100 psi (6.9 bar)  
320 gpm (1211 L/M) @ 200 psi (13.8 bar)  
165 gpm (625 L/M) @ 250 psi (17.2 bar)

