


HE 64RS "HERCULES" MARINISED PORTABLE

ULTRA HIGH VOLUME PERFORMANCE SKID MOUNT PUMP

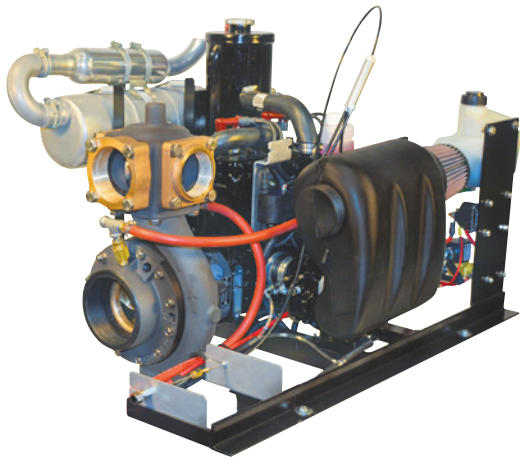

ENGINE

Rotax 582: Liquid-cooled, 64 HP, 12-volt electric starter, recoil rope start back-up, 6 gal. fuel tank, hose and adapter

DIMENSIONS & WEIGHT


- 34" L x 30"W x 26"H, 215 lbs. (199 kg)

APPLICATIONS

- Fire boat, booster tank fill, multiple hand lines, wildland/attack fire suppression


STANDARD FEATURES

- 170W lighting and recharging coil
- Aluminum alloy casing
- Bronze impeller and seal ring
- Stainless steel impeller shaft
- Mechanical seal
- Heat exchanger with thermal protection circuit
- Wrap around frame with fold out handles
- Control panel with governor, ignition switch and light, starting switch and compound
- pressure gauge
- Loss of prime shutdown
- Vernier throttle
- Pressure Governor
- 4" NH suction intake with screen
- 3" NPT discharge

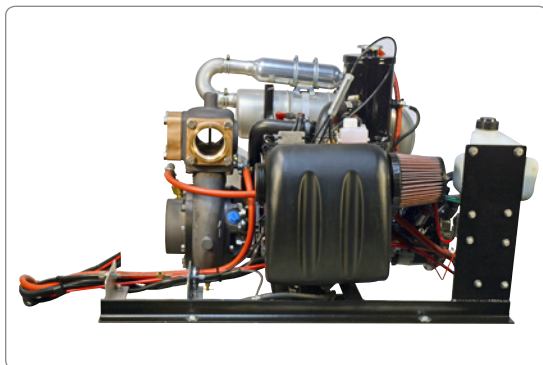

OPTIONS

- Adapters, gauge, battery, caps and bronze pump valve

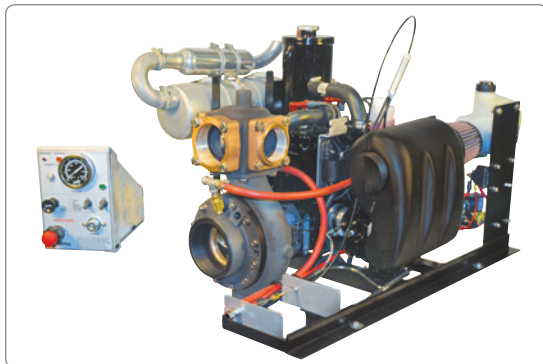

PERFORMANCE

575 gpm (2176 L/M) @ 100 psi (6.9 bar)
320 gpm (1211 L/M) @ 200 psi (13.8 bar)
165 gpm (625 L/M) @ 250 psi (17.2 bar)

