

HSE 65K KUBOTA

ENGINE

- Kubota V2403T Diesel: 65 HP, liquid cooled, 12 volt starter, 40 amp. alternator, fuel and oil pump filters

DIMENSIONS & WEIGHT


- 47.4" L x 52.3" W x 27.8" H, 840 lbs. (381 kg)

STANDARD FEATURES

- Hard anodized aluminum alloy pump casing and discharge
- Aluminum alloy gear case and engine adapter
- Bronze impeller and wear rings
- Stainless steel impeller shaft
- Mechanical seal
- Heat treated alloy steel helical gears
- Ball bearing construction
- Electronic throttle
- Power indicator light
- Digital pressure readout
- Hour meter
- Oil psi
- Tachometer
- Engine coolant temperature
- Volt meter
- Overridable engine shutdowns
- 4" NPT suction
- 3" NPT discharges

PERFORMANCE

- 350 gpm (1324 L/M) @ 180 psi (12.4 bar)
- 300 gpm (1136 L/M) @ 200 psi (13.8 bar)
- 200 gpm (757 L/M) @ 260 psi (17.9 bar)
- 100 gpm (378 L/M) @ 330 psi (22.8 bar)

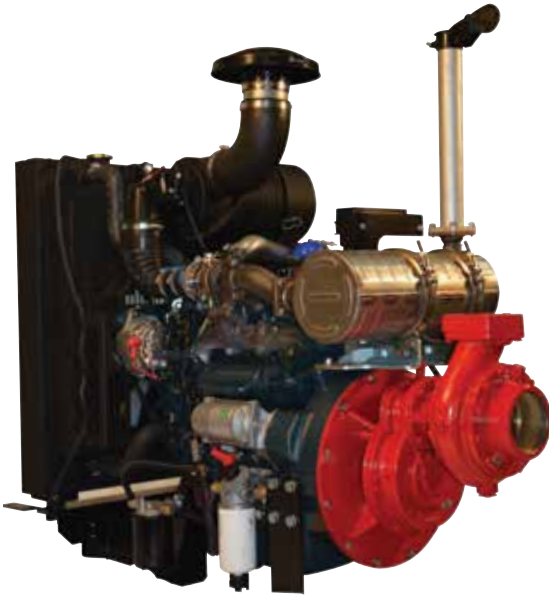

OPTIONAL INTEGRAL PRESSURE GOVERNOR AND LOSS OF WATER PROTECTION AVAILABLE ON PANELS

