


LDMBC

SINGLE STAGE, CENTRIFUGAL, MIDSHIP MOUNTED,
BELT DRIVEN COMPRESSOR

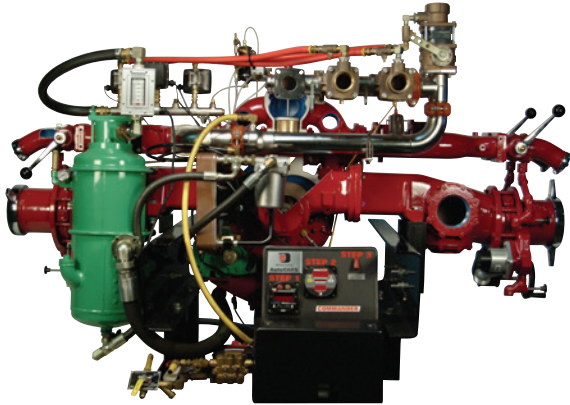

DIMENSIONS & WEIGHT


- 40" L x 76" W x 46" H, 2200 lbs. (997 kg)

APPLICATIONS

- Aerial, pumper, pumper tanker, rescue pumper

STANDARD FEATURES

- LDMBC 1000-1750 pump assembly
- 4 - 2½" NH, ¼ turn, ball valves
- 2 - 5" or 6" NH suction adapters and caps
- Discharge and suction companion flanges as needed
- 1610 or 1710 full round yokes standard
- Air shift
- AZ02900 220 cfm compressor package
- YE06101 CAFS manifold
- 1 - 2½" and 3 - 2" flanged outlets
- 3 - AZ02500 2" CAFS discharge valve assemblies
- AZ02600 2½" CAFS discharge valve assembly
- AZ02301 ½" air valve manifold with air flow meter
- AutoCAFS™ Commander control system

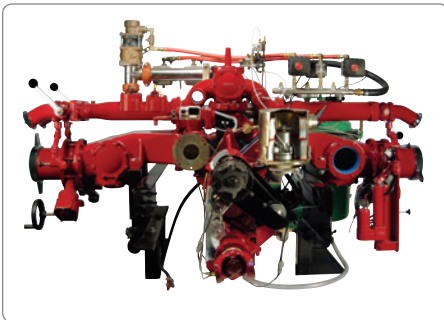

OPTIONS

- 3" tank to pump valve assembly with 4" front tank connection
- 3" LDH discharge
- Manual intake butterfly
- Electric intake butterfly
- FoamPro 2001 Foam System

PERFORMANCE

SIMULTANEOUS WATER PERFORMANCE

Up to 1750 gpm (6624 L/M) @ 125 psi (8.6 bar)
NFPA RATINGS FROM 1000 - 1750

SIMULTANEOUS COMPRESSED AIR PERFORMANCE

220 gpm (6229 L/M) @ 125 psi (8.6 bar)

