


LDMH 1000, 1250, 1500, 1750

SINGLE STAGE, CENTRIFUGAL, MIDSHIP MOUNTED

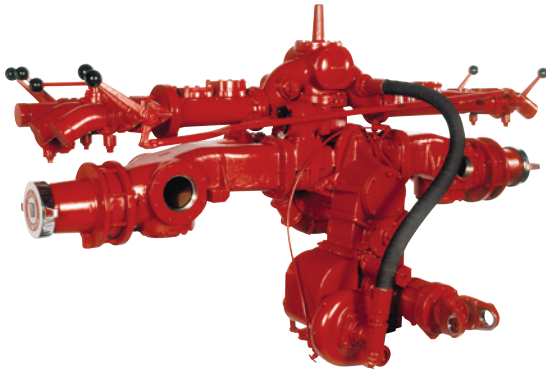

DIMENSIONS & WEIGHT

- 46" L x 84" W x 44" H, 1,340 lbs. (608 kg)

APPLICATIONS

- Aerial, pumper, pumper tanker, rescue pumper, tanker

STANDARD FEATURES

- High pressure booster pump (rated 1500 gpm max.)
- 4 - 2½" NH, ¼ turn, ball, self-locking valves and caps, mounted
- 2 - 5" or 6" NH suction adapters and caps
- Choice of 1½", 2½" or 3" companion flanges, discharge or suction (as needed)
- 1610 or 1710 full round yokes standard
- Air shift
- 2½" driveline, 12¼" driveline drop
- Injection packing. Mechanical seal optional.
- Heat treated gears

PERFORMANCE

LDMH 1000

1000 gpm (3785 L/M) @ 150 psi (10.3 bar)
700 gpm (2646 L/M) @ 200 psi (13.8 bar)
500 gpm (1893 L/M) @ 250 psi (17.2 bar)

LDMH 1250

1250 gpm (4731 L/M) @ 150 psi (10.3 bar)
875 gpm (3312 L/M) @ 200 psi (13.8 bar)
625 gpm (2365 L/M) @ 250 psi (17.2 bar)

LDMH 1500

1750 gpm (6624 L/M) @ 150 psi (10.3 bar)
1225 gpm (4637 L/M) @ 200 psi (13.8 bar)
875 gpm (3312 L/M) @ 250 psi (17.2 bar)

LDMH 1750

1750 gpm (6624 L/M) @ 150 psi (10.3 bar)
1225 gpm (4637 L/M) @ 200 psi (13.8 bar)
875 gpm (3312 L/M) @ 250 psi (17.2 bar)

HIGH PRESSURE

200 gpm (757 L/M) @ 400 psi (27.6 bar)
100 gpm (379 L/M) @ 600 psi (41.3 bar)

