


## LSR 500, 750, 1000

SINGLE STAGE, CENTRIFUGAL, PTO DRIVEN, 3 GEAR GEARCASE

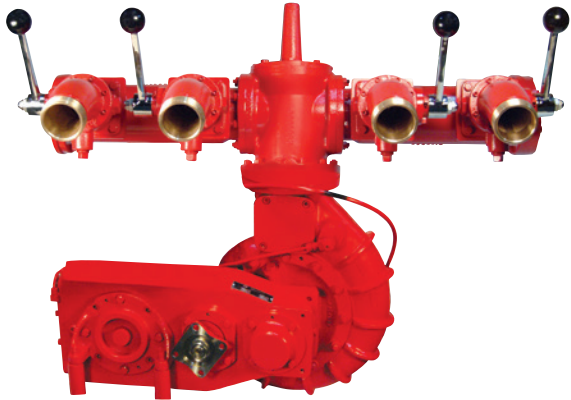

### DIMENSIONS & WEIGHT

- 34"H x 38"W x 26"D, 435 lbs. (197 kg)

### APPLICATIONS

- Pumper, pumper tanker, rescue pumper, wildland/attack fire

### STANDARD FEATURES

- 4" or 5" NPT or weld discharge flange
- 5" or 6" NPT or weld flange suction
- Rotation: Engine or opposite engine
- 1410 lock on yoke

### PERFORMANCE

#### LSR 500

500 gpm (1893 L/M) @ 150 psi (10.3 bar)  
350 gpm (1325 L/M) @ 200 psi (13.8 bar)  
250 gpm (946 L/M) @ 250 psi (17.2 bar)

#### LSR 750

750 gpm (2839 L/M) @ 150 psi (10.3 bar)  
525 gpm (1987 L/M) @ 200 psi (13.8 bar)  
375 gpm (1419 L/M) @ 250 psi (17.2 bar)

#### LSR 1000

1000 gpm (3785 L/M) @ 150 psi (10.3 bar)  
700 gpm (2646 L/M) @ 200 psi (13.8 bar)  
500 gpm (1893 L/M) @ 250 psi (17.2 bar)

