


LSRH 500, 750, 1000

DOUBLE STAGE, CENTRIFUGAL, REAR MOUNT PUMP
WITH INDEPENDENT SECOND STAGE

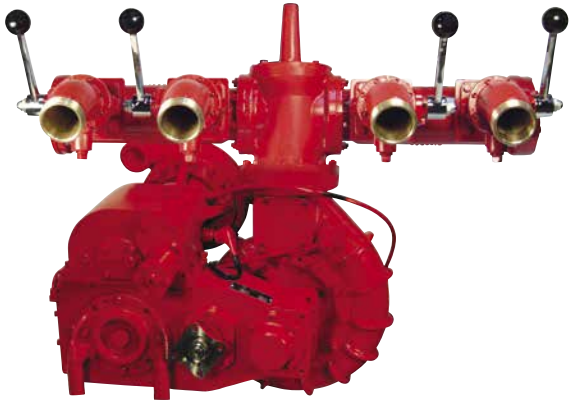

DIMENSIONS & WEIGHT

- 34" H x 38" W x 33" D, 446 lbs. (202 kg) - Assy #1

APPLICATIONS

- Pumper, pumper tanker, rescue pumper, wildland/attack fire

STANDARD FEATURES

- 4" or 5" NPT or weld discharge flange
- 5" or 6" NPT or weld flange suction
- Rotation: Engine or opposite engine
- 1410 lock on yoke

PERFORMANCE

LSRH 500

500 gpm (1893 L/M) @ 150 psi (10.3 bar)
350 gpm (1325 L/M) @ 200 psi (13.8 bar)
250 gpm (946 L/M) @ 250 psi (17.2 bar)

LSRH 750

750 gpm (2839 L/M) @ 150 psi (10.3 bar)
525 gpm (1987 L/M) @ 200 psi (13.8 bar)
375 gpm (1419 L/M) @ 250 psi (17.2 bar)

LSRH 1000

1000 gpm (3785 L/M) @ 150 psi (10.3 bar)
700 gpm (2646 L/M) @ 200 psi (13.8 bar)
500 gpm (1893 L/M) @ 250 psi (17.2 bar)

LSRH HIGH PRESSURE

200 gpm (757 L/M) @ 500 psi (34.5 bar)
100 gpm (379 L/M) @ 600 psi (41.3 bar)

