

## SPECIFICATIONS

# MODEL 420 PUMP-TWIN PRIME

### Specifications

- 4" inlet and outlet
- Heads to 160 ft
- Capacities to 750 gpm

### Options

- Camlock fittings
- A variety of seal options
- Electric or engine driven
- Close coupled or belt driven
- Skid or trailer mounting




For drainage, sewage, fertilizer, and more. Dual volute design means faster priming and eliminates priming valves and jets. Self cleaning and flushing action design to minimize settling and clogging from debris.

A double seal means double life and double dependability in this most critical part of your pump.

Dynamically balanced trash type impeller results in minimum end thrust and maximum seal life by keeping mud and sand sucked away from the seal. Large free flow built in check valve on all pumps. No need for a foot valve.

Ohler pumps are built for years of reliable and hassle free operation.

Ohler Pumps - Ho nest to Goodness Value!

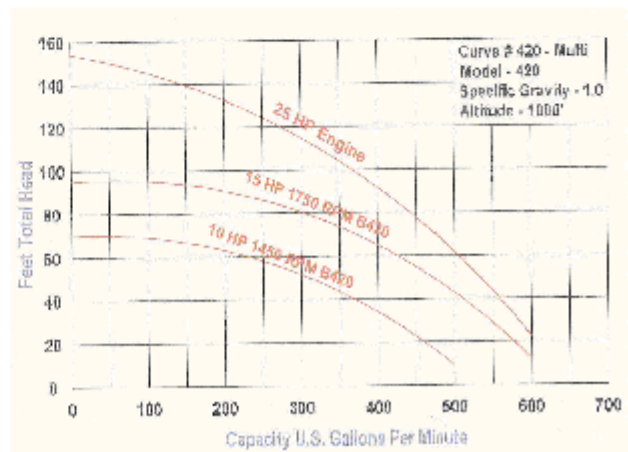

**WHEN YOU THINK PUMPS - THINK OHLER!**