


OHLER PUMP

MODEL 4600 SELF-CONTAINED DEWATERING SYSTEM DIESEL POWERED

Model 4600 Specifications:

Self contained w/35 HP Diesel engine
100 feet of Tri-hose
Manual control valves
Positive displacement pump head
Reversible pump head
Up to 400 foot heads
Depth to 250 feet

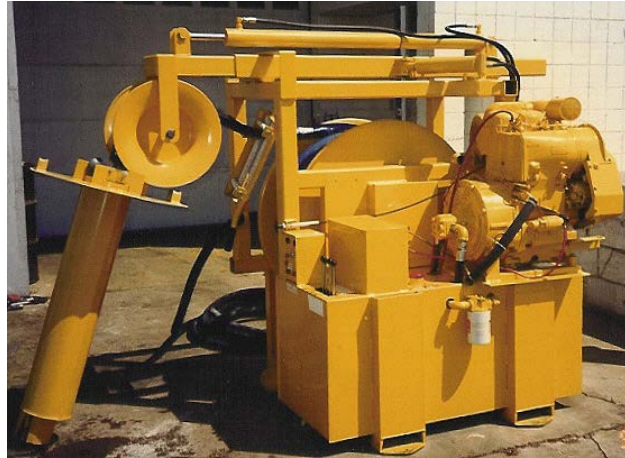

This unit features a 6 inch diameter, single stage, hydraulically powered progressive cavity, positive displacement pump for field proven process performance under adverse conditions. Manually controlled hydraulics extend, retract and swing the boom side to side allowing easy positioning of pump head and hole guard over the blast hole. Manually controlled level wind provides for smooth hose build up. Manual hydraulic valve permits raising and lowering of pump head with infinite speed control. Hydraulic reverse allows for cleaning of drill cuttings. The pump automatically stops pumping and an indicator light signals when the dewatering cycle is completed. This unit features a 35 HP Diesel engine and comes standard with 100 feet of Tri-hose for 80 foot deep blast holes. Optional - 200 feet of Tri-hose and reel for 180 foot deep blast holes.

This unit is self contained and designed for truck or trailer mounting.

OHLER PUMP

501 Maple St.
P.O. Box 386
Janesville, Iowa 50647

Phone: 319-987-2121
Fax: 319-987-2161

Email: ohler@ohler-machinery.com

*WHEN YOU THINK
PUMPS - THINK OHLER*

