


# PSF - IC 1000, 1250, 1500 MARINISED

SINGLE STAGE, INTRA-CAB MOUNTED PUMP DRIVEN OFF FRONT CRANKSHAFT

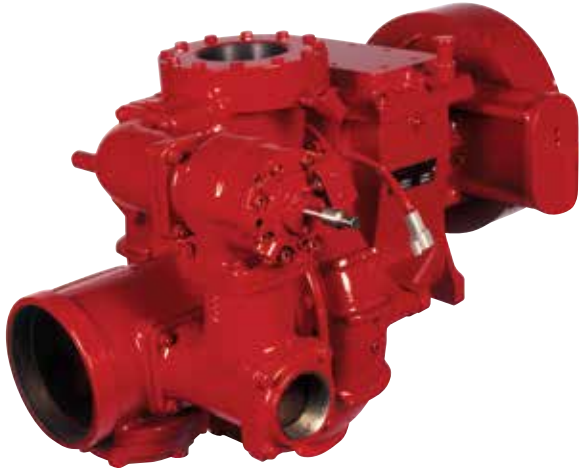

## DIMENSIONS & WEIGHT

- 33"L x 18"W x 24"H, 650 lbs. (295 kg)

## APPLICATIONS

- Pumper, rescue pumper, tanker

## STANDARD FEATURES

- 4" NPT discharge
- 6" NPT, weld flange or victaulic suction
- Complete mounting kit
- Heavy duty 1000 lb-ft electric clutch
- Shock Control Module - prevents engaging clutch at high speeds

## PERFORMANCE

### PSF-IC 1000

1000 gpm (3785 L/M) @ 150 psi (10.3 bar)  
700 gpm (2646 L/M) @ 200 psi (13.8 bar)  
500 gpm (1893 L/M) @ 250 psi (17.2 bar)

### PSF-IC 1250

1250 gpm (4731 L/M) @ 150 psi (10.3 bar)  
875 gpm (3312 L/M) @ 200 psi (13.8 bar)  
625 gpm (2365 L/M) @ 250 psi (17.2 bar)

### PSF-IC 1500

1500 gpm (5678 L/M) @ 150 psi (10.3 bar)  
1050 gpm (3974 L/M) @ 200 psi (13.8 bar)  
750 gpm (2839 L/M) @ 250 psi (17.2 bar)

