



2BE6.5H (P6)

Portable Gasoline-Powered Pump

Specifications

Dimensions & Weight

- 18" L x 16" W x 19" H
- 49 lbs. (22 kg)

Applications

- Dewatering
- Light duty brush truck
- Transfer and supply

Engine


- Honda GX200: Air-cooled 4 stroke OHV, single cylinder, 6.5 HP, recoil rope start back-up
- NSN: 4320-01-470-5515

Features

- Air cooled 4 stroke OHV
- Single cylinder
- Horizontal shaft
- 6.5 hp (4.8kW 3,600 rpm) max
- Torque 1.35kg-m/2,500
- Transitioned pointless ignition system
- Recoil starting system
- Fuel tank capacity 6 qt.
- Dual silent air cleaner
- 2011 Carb and EPA Compliant
- 3" cam lock suction
- 3" cam lock discharge

Options

- Discharge hose
- Container and cover
- Adapters
- Suction hose with strainer

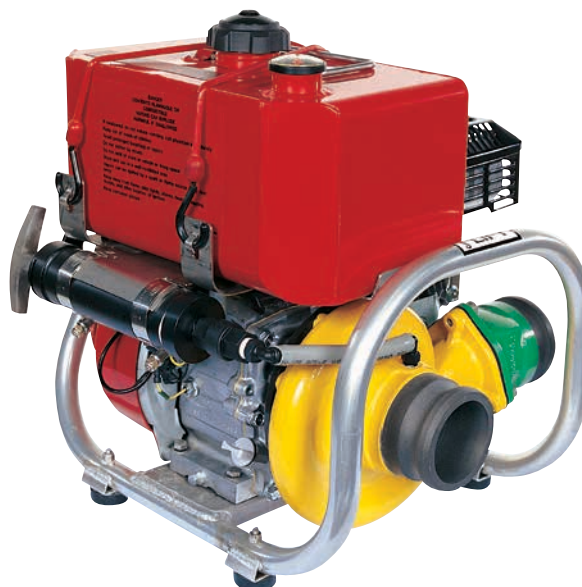

Choice of
the US
Coast Guard

Medium Pressure, High Volume, Direct Drive, Engine Mounted

Performance

275 gpm (1040 L/M) @ 12 psi (0.8 bar)

175 gpm (662 L/M) @ 28 psi (1.9 bar)

100 gpm (378 L/M) @ 45 psi (3.1 bar)

darley.com/pumps
630.735.3500

